


### CLIPS FOR NON-SLIP METAL GRATINGS FOR OUTDOOR FLOORS AND STAIRS WITH GRATING STEPS

#### TECHNICAL FEATURES

PVC clip reinforced with internal spring in harmonic steel

Thickness	2/5 mm
Footfall thickness	2,5 mm
Duration	over 5 years

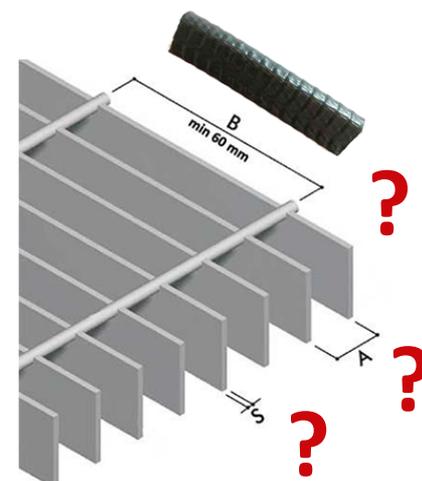

Before asking for a quote for non-slip clips, please let us know the width of the grating mesh (B), the thickness of the vertical plate (S) and how many square meters you have to equip with the clips, including the steps of the staircase, the landings and the floors in grating.

#### Easy and inexpensive assembly of anti-slip clips for floors and stairs in grating

The assembly is very simple, it is sufficient to insert the clips manually by pressure on the 2 - 3 / 4 - 5 mm thick bearing plate S, and carry out the alignment with the hammer.

Please, let us know the width B of the grating, so that we can supply you with the right size pieces for your grating.

No simple protective gloves are needed.  
No need for adhesives, screws, bolts or maintenance.

The quantities to be inserted, linearly or randomly, are a function of the grid positioning surface, they are fixed on the steps of the external grating stairs and on the walking surfaces according to the direction and the traffic.

It is advisable to insert the clips every 10/12 cm alternating.

